

■ APPLICATION 用途
Dual-band WLAN, GPS + WiFi.

■ FIGURE AND DIMENSION 外观尺寸

Figure A

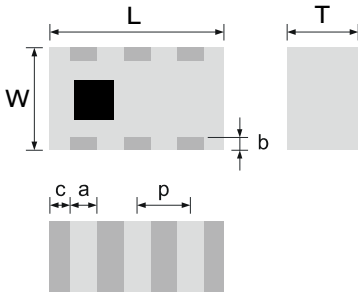


Figure B


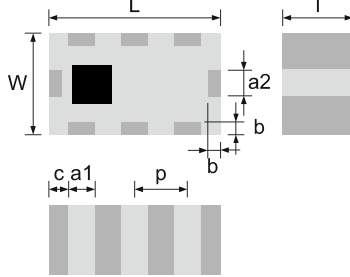


Figure C

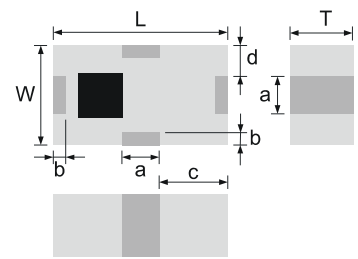


Unit: mm

Figure	L	W	T	a/a1/a2	b	c	d/p
A	1.60±0.10	0.80±0.10	0.60±0.10	0.30+0.10 -0.15	0.15±0.10	0.65±0.15	0.25±0.15
	2.00±0.15	1.25±0.15	0.95±0.10	0.30±0.20	0.25±0.20	0.20±0.20	0.65±0.20
B	2.00±0.15	1.25±0.15	0.95±0.10	0.30±0.20	0.25±0.20	0.20±0.20	0.65±0.20
C	1.60±0.10	0.80±0.10	0.60±0.10	0.30+0.10 -0.15	0.15±0.10	0.65±0.15	0.25±0.15


■ TERMINATION CONFIGURATION 脚位图

LTD-1608


2G4-A1/A3

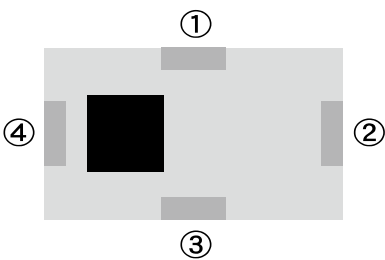

2G4-A2/A4

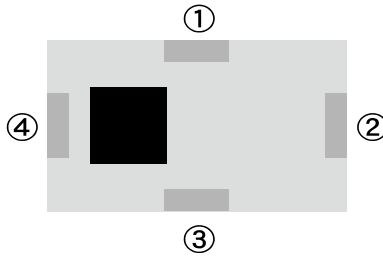

1G5-A1




- ① GND
- ② Low Frequency Port
- ③ Common Port
- ④ High Frequency Port

- ① GND
- ② High Frequency Port
- ③ Common Port
- ④ Low Frequency Port

- ① High Frequency Port
- ②④⑥ GND
- ③ Low Frequency Port
- ⑤ Common Port

LTD-2012

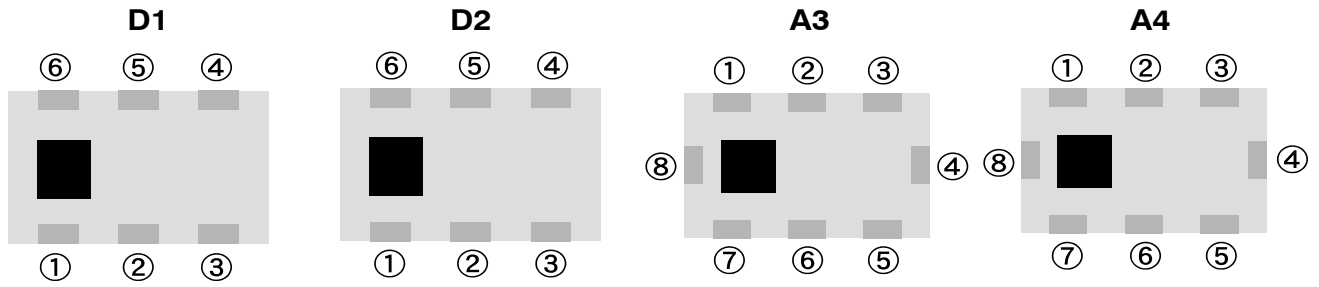

- | | | | |
|-----------------------|-----------------------|-----------------------|-----------------------|
| ① Low Frequency Port | ① High Frequency Port | ① ③ ⑤ ⑥ ⑦ GND | ① ② ③ ⑤ ⑦ GND |
| ③ High Frequency Port | ③ Low Frequency Port | ② Common Port | ④ High Frequency Port |
| ⑤ Common Port | ⑤ Common Port | ④ High Frequency Port | ⑥ Common Port |
| ② ④ ⑥ GND | ② ④ ⑥ GND | ⑧ Low Frequency Port | ⑧ Low Frequency Port |

ELECTRICAL SPECIFICATION 电气规格

Part No. 型号	Port 埠	Pass Band 带宽(MHz)	Insertion Loss 插入损耗	VSWR 电压驻波比	Attenuation 带外抑制	Figure 外观
LTD-1608-1G5S1-A1	Common to Low Freq. Port	1575	0.6 dB max.	2.0 max.	18 dB min. at 2400~2500 MHz	A
	Common to High Freq. Port	2400~2500	0.6 dB max.	2.0 max.	20 dB min. at 1575 MHz	
	Common Port	1575	-	2.0 max.	-	
2400~2500		2.0 max.				
LTD-1608-2G4S1-A1	Common to Low Freq. Port	2400~2500	0.8 dB max.	2.0 max.	20 dB min. at 4900~6000 MHz	C
	Common to High Freq. Port	4900~5850	1.1 dB max.	2.0 max.	20 dB min. at 2400~2500 MHz	
					15 dB min. at 9800~11700 MHz	
Common Port	2400~2500	-	2.0 max.	-		
	4900~5850		2.0 max.			
LTD-1608-2G4S1-A2	Common to Low Freq. Port	2400~2500	0.8 dB max.	2.0 max.	20 dB min. at 4900~6000 MHz	C
	Common to High Freq. Port	4900~5850	1.1 dB max.	2.0 max.	20 dB min. at 2400~2500 MHz	
					15 dB min. at 9800~11700 MHz	
Common Port	2400~2500	-	2.0 max.	-		
	4900~5850		2.0 max.			
LTD-1608-2G4S1-A3	Common to Low Freq. Port	2400~2500	0.7 dB max.	2.0 max.	20 dB min. at 4800~6000 MHz	C
	Common to High Freq. Port	4900~5850	0.9 dB max.	2.0 max.	20 dB min. at 2400~2500 MHz	
					-	
Common Port	2400~2500	-	2.0 max.	-		
	4900~5850		2.0 max.			

Low Temperature Cofired Ceramics Series

CUTTING-EDGE TECHNOLOGIES OF RF SOLUTIONS

Diplexer 双工器

Part No. 型号	Port 埠	Pass Band 带宽(MHz)	Insertion Loss 插入损耗	VSWR 电压驻波比	Attenuation 带外抑制	Figure 外观
LTD-1608- 2G4S1-A4	Common to Low Freq. Port	2400~2500	0.7 dB max.	2.0 max.	20 dB min. at 4800~6000 MHz	C
	Common to High Freq. Port	4900~5850	0.9 dB max.	2.0 max.	20 dB min. at 2400~2500 MHz	
	Common Port	2400~2500	-	2.0 max.	-	
4900~5850		2.0 max.				
LTD-2012- 2G4S1-D1	Common to Low Freq. Port	2400~2500	0.7 dB max.	2.0 max.	20 dB min. at 4800~6000 MHz 15 dB min. at 7200~7500 MHz	A
	Common to High Freq. Port	4900~5950	1.0 dB max.	2.0 max.	20 dB min. at 1800~2500 MHz 20 dB min. at 9800~11900 MHz	
	Common Port	2400~2500	-	2.0 max.	-	
4900~5950		2.0 max.				
LTD-2012- 2G4S1-D2	Common to Low Freq. Port	2400~2500	0.7 dB max.	2.0 max.	20 dB min. at 4800~6000 MHz 20 dB min. at 7200~7500 MHz	A
	Common to High Freq. Port	4900~5950	1.0 dB max.	2.0 max.	20 dB min. at 1800~2500 MHz 25 dB min. at 9800~11900 MHz 15 dB ref. at 14700~17850 MHz	
	Common Port	2400~2500	-	2.0 max.	-	
4900~5950		2.0 max.				
LTD-2012- 2G4S1-A3	Common to Low Freq. Port	2400~2500	0.7 dB max.	1.7 max.	20 dB min. at 4800~6000 MHz	B
	Common to High Freq. Port	4900~5850	0.9 dB max.	1.8 max.	20 dB min. at 2400~2500 MHz	
	Common Port	2400~2500	-	1.7 max.	-	
4900~5850		1.8 max.				
LTD-2012- 2G4S1-A4	Common to Low Freq. Port	2400~2500	0.7 dB max.	1.7 max.	20 dB min. at 4800~6000 MHz	B
	Common to High Freq. Port	4900~5850	0.9 dB max.	1.8 max.	20 dB min. at 2400~2500 MHz	
	Common Port	2400~2500	-	1.7 max.	-	
4900~5850		1.8 max.				

©Please contact us for detail information.