APPLICATION

PDA, notebook, desktop, and server applications
Low profile, high current power supplies
Battery powered devices
DC/DC converters in distributed power systems
DC/DC converters for field programmable gate array

FEATURES

RoHS compliant & Halogen Free
Super low resistance, ultra high current rating
High performance (I sat) realized by Iron powder core

PRODUCT IDENTIFICATION

① ② ③ ④ ⑤
MND – 07AEI 1R0 M - XG

① Product Code
② Dimensions : 7.7 x 8.0 x 1.5 mm
③ Inductance : 1R0 = 1.0μ H
④ Tolerance : M = ±20%
⑤ Series Type : XG Type

NOTE：Please refer to the “Product Dimension” for detail dimensions.

PRODUCT DIMENSION

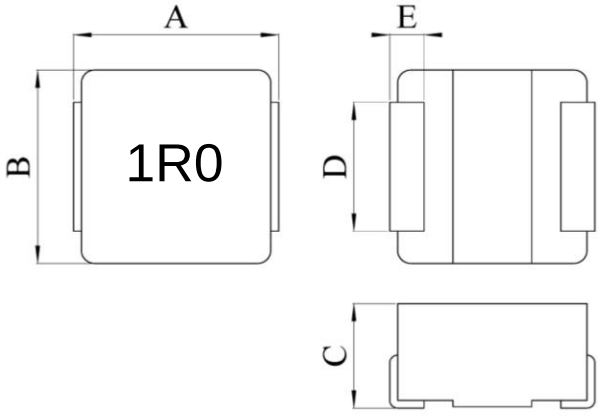

PRODUCT NO.	A	B	C	D	E
MND-07AEISERIES-XG	**7.2 ± 0.5**	**7.5 ± 0.5**	**1.5 Max**	**5.0± 0.3**	**1.5± 0.3**

ELECTRICAL REQUIREMENTS

PART NUMBER	INDUCTANCE Lo(μ H)±20% @0A	R_{dc} (mΩ)		HEAT RATING CURRENT(Idc) DC AMPS[1]	SATURATION CURRENT(Isat) DC AMPS[2]
		Typ.	Max		
MND-07AEIR25M-XG	**0.25**	**3.9**	**4.3**	**20**	**14.5**
MND-07AEIR47M-XG	**0.47**	**5.8**	**6.38**	**17**	**11.5**
MND-07AEIR68M-XG	**0.68**	**7.7**	**8.47**	**15**	**10**
MND-07AEI1R0M-XG	**1.0**	**12.3**	**13.6**	**12**	**7.4**
MND-07AEI1R5M-XG	**1.5**	**14.7**	**16.2**	**9.1**	**6.6**
MND-07AEI2R2M-XG	**2.2**	**22**	**24.2**	**8.25**	**6.3**

TEST FREQUENCY: 100 KHz, 0.25V

TESTING INSTRUMENT L: Agilent4284A, WK4235, CH3302/G LCR METER
CH1320, CH1320S BIAS CURRENT SOURCE
R_{dc} : CH11025, GOM802 MICRO OHMMETER

NOTES:

1. DC current (Idc) that will cause an approximate △T of 40℃
2. DC current (Isat) that will cause Lo to drop approximately 30%
3. All test data is referenced to 25℃ ambient
4. Operating Temperature Range -40℃ to +125℃
5. The part temperature (ambient + temp rise) should not exceed 125℃ under the worst operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

ELECTRICAL CHARACTERISTICS

Reference data

MND-07AEIR25M-XG

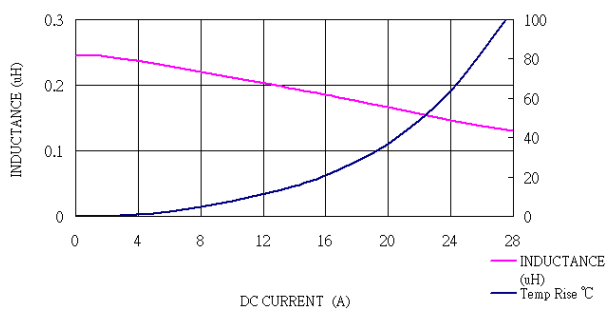

MND-07AEIR47M-XG

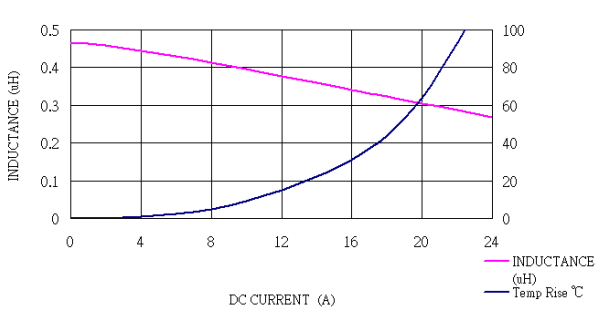

MND-07AEIR68M-XG

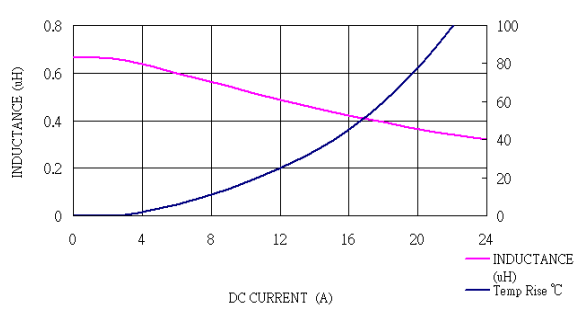

MND-07AEI1R0M-XG

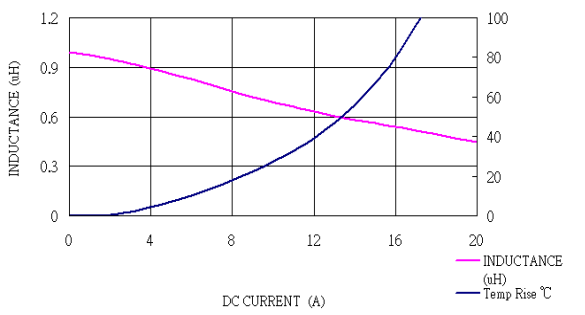

MND-07AEI1R5M-XG

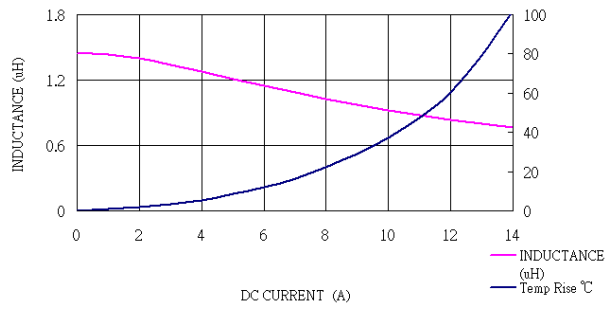

MND-07AEI2R2M-XG

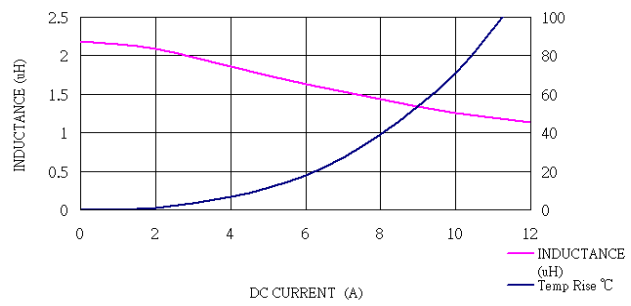

PACKAGING

- **Peel-off Force**

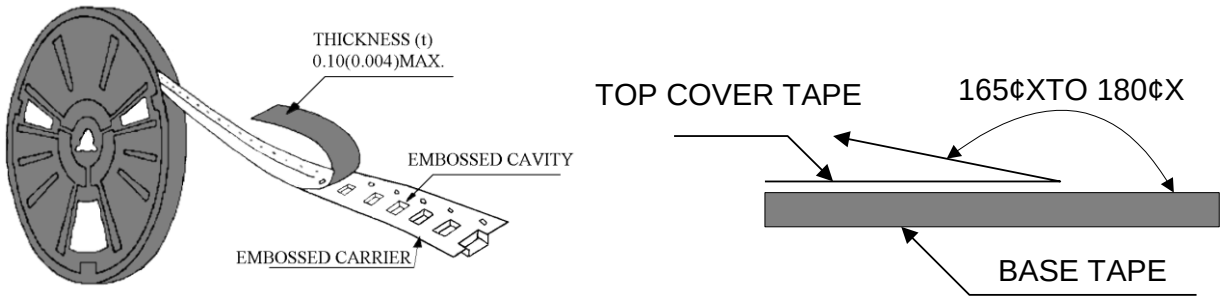

The force for peeling off cover tape is 10 to 70 grams in the arrow direction.

- **Dimension** (Unit: mm)

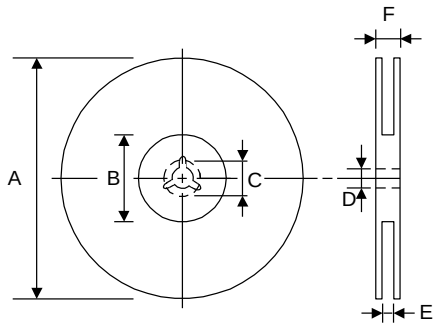

TYPE	A	B	C	D	E	F
330 mm	330±2	100±1	20±0.5	13 ±1.0	16 ±0.5	20 ±2

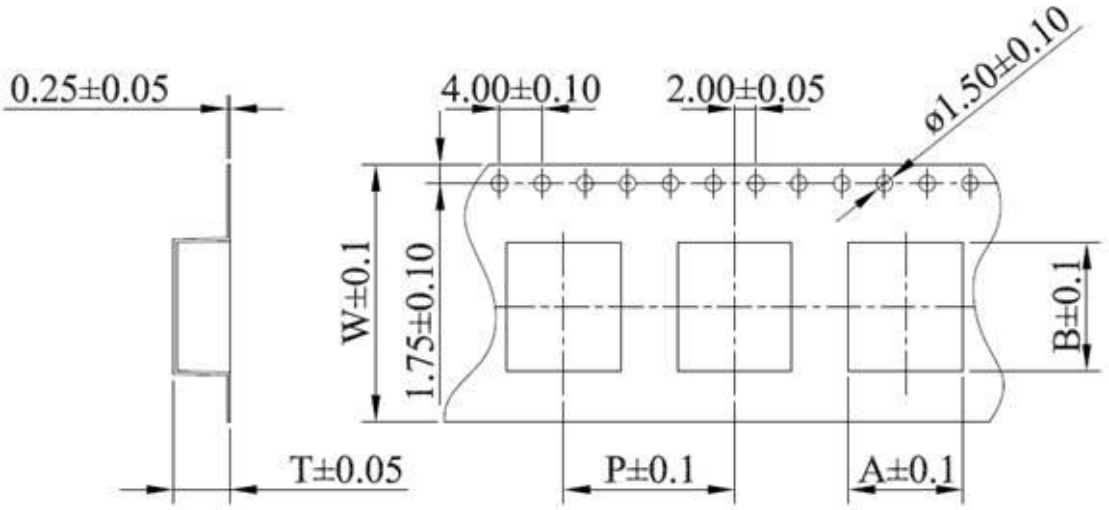

TYPE	SIZE	A	B	W	P	T
MND	07AE	8.2	7.9	16	12	1.8

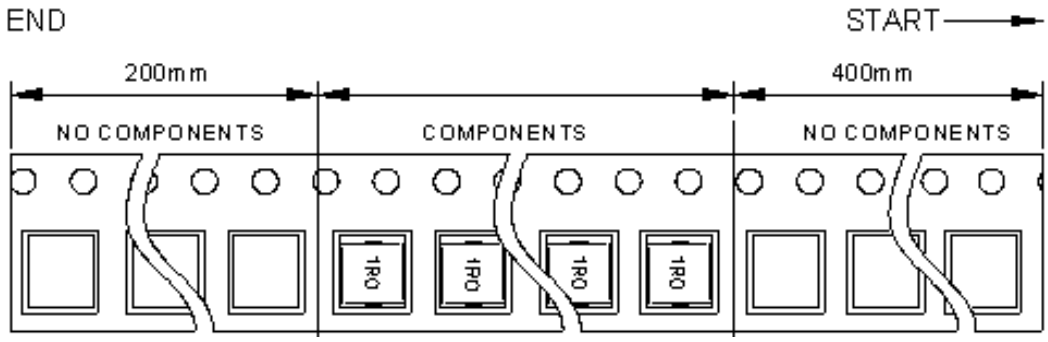

- **Taping Quantity**

SERIES	07AE
PCS/Reel	1000

CARTON:

MIDDLE PACKAGING: 2 Reels /BOX

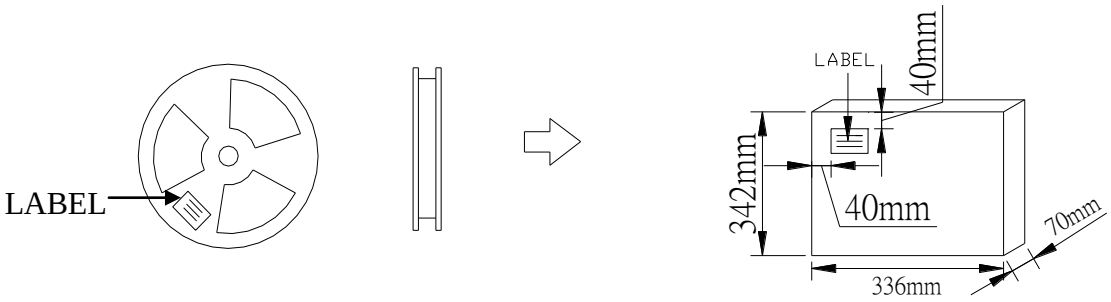
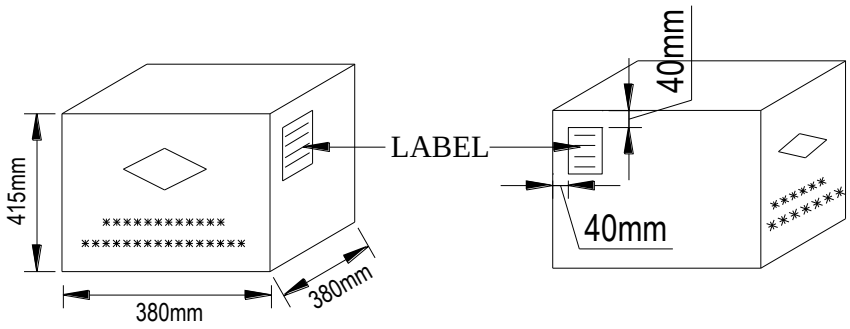
EXTERNAL PACKAGING: 5 BOXES / CARTON