


MAG LAYERS USA, Inc

Material description

.....

Component type : MLB, MLI chip bead & inductor

Description :

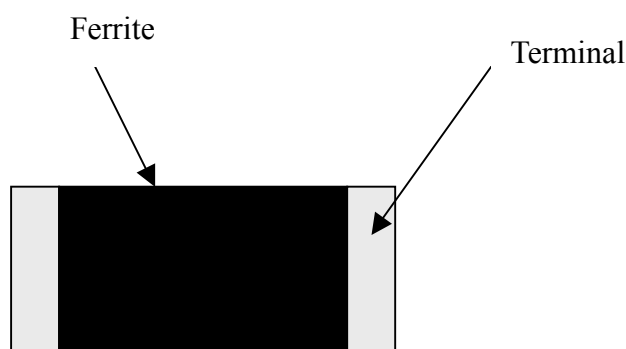

Terminal : Ag/Cu/Ni/Sn all (Lead free alloy)

Copper 1.5um min., Ni 1.25um min., Tin 2.5um min.

Ferrite : N1, N2, N3, N4,

Lead : 8000 – 55000 ppm used in ferrite material

(not banned by law)

Solder Profile: Temperature up to 265 degree C (20 seconds)

Solder Material H63A (Eutectic solder) or equal



MAG LAYERS USA, INC
1502 Brookhollow Dr, Suite C
Santa Ana, CA 92705

(800) 427-4010
(714) 427-5834 fax
www.maglayersusa.com