

SCOPE :

This specification applies to the Pb Free high current type SMD inductors for
MSCDRI-1040-SERIES


PRODUCT IDENTIFICATION

MSCDRI - 1040 - 100 M

① ② ③ ④

- ① Product Code
- ② Dimensions Code
- ③ Inductance Code
- ④ Tolerance Code

(1) SHAPES AND DIMENSIONS

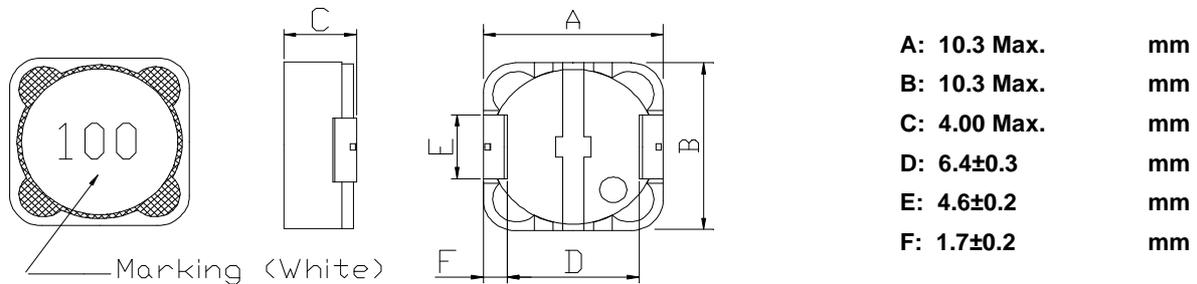

(2) ELECTRICAL SPECIFICATIONS

SEE TABLE 1

TEST INSTRUMENTS

- L : HP 4284A PRECISION LCR METER (or equivalent)
- RDC : CHROMA MODEL 16502 MILLIOHM METER (or equivalent)

(3) CHARACTERISTICS

- (3)-1 Ambient temperature +60°C Max.
- (3)-2 Operate temperature range -40°C ~ +125°C
(Including self temp. rise)
- (3)-3 Storage temperature range -40°C ~ +125°C



TABLE 1

| MAGLAYERS PT/NO. | Inductance L(μH) | Percent Tolerance | Test Frequency | Resistance | | Rated DC Current | | Marking |
|---------------------|---------------------|----------------------|-------------------|------------|------------|------------------|---------|---------|
| | | | | RDC(Ω)Typ. | RDC(Ω)Max. | IDC1(A) | IDC2(A) | |
| MSCDRI-1040-1R0□ | 1.0 | N | 100kHz/0.1V | 8.5m | 11.5m | 12.0 | 12.0 | 1R0 |
| MSCDRI-1040-1R5□ | 1.5 | N | 100kHz/0.1V | 12.0m | 16.2m | 11.0 | 10.8 | 1R5 |
| MSCDRI-1040-1R8□ | 1.8 | N | 100kHz/0.1V | 14.1m | 19.1m | 10.2 | 10.0 | 1R8 |
| MSCDRI-1040-2R5□ | 2.5 | N | 100kHz/0.1V | 19.0m | 25.7m | 8.50 | 8.30 | 2R5 |
| MSCDRI-1040-3R3□ | 3.3 | N | 100kHz/0.1V | 27.0m | 36.5m | 7.60 | 7.00 | 3R3 |
| MSCDRI-1040-4R7□ | 4.7 | M,N | 100kHz/0.1V | 29.0m | 39.2m | 7.00 | 6.20 | 4R7 |
| MSCDRI-1040-5R2□ | 5.2 | M,N | 100kHz/0.1V | 33.0m | 44.6m | 6.50 | 6.00 | 5R2 |
| MSCDRI-1040-6R2□ | 6.2 | M,N | 100kHz/0.1V | 38.0m | 51.3m | 5.60 | 5.00 | 6R2 |
| MSCDRI-1040-7R3□ | 7.3 | M,N | 100kHz/0.1V | 45.0m | 60.8m | 4.80 | 4.50 | 7R3 |
| MSCDRI-1040-100□ | 10 | M,N | 100kHz/0.1V | 57.0m | 77.0m | 4.40 | 3.90 | 100 |
| MSCDRI-1040-150□ | 15 | M,N | 100kHz/0.1V | 87.0m | 0.117 | 3.60 | 3.30 | 150 |
| MSCDRI-1040-220□ | 22 | M,N | 100kHz/0.1V | 0.122 | 0.159 | 3.20 | 2.50 | 220 |
| MSCDRI-1040-330□ | 33 | M,N | 100kHz/0.1V | 0.186 | 0.242 | 2.50 | 2.00 | 330 |
| MSCDRI-1040-470□ | 47 | M,N | 100kHz/0.1V | 0.275 | 0.358 | 2.10 | 1.65 | 470 |
| MSCDRI-1040-560□ | 56 | M,N | 100kHz/0.1V | 0.314 | 0.408 | 1.90 | 1.40 | 560 |
| MSCDRI-1040-680□ | 68 | M,N | 100kHz/0.1V | 0.367 | 0.477 | 1.80 | 1.30 | 680 |
| MSCDRI-1040-101□ | 100 | M,N | 100kHz/0.1V | 0.537 | 0.698 | 1.45 | 1.10 | 101 |
| MSCDRI-1040-151□ | 150 | M,N | 100kHz/0.1V | 0.845 | 1.090 | 1.25 | 0.90 | 151 |
| MSCDRI-1040-221□ | 220 | M,N | 100kHz/0.1V | 1.22 | 1.586 | 0.90 | 0.80 | 221 |
| MSCDRI-1040-331□ | 330 | M,N | 100kHz/0.1V | 1.77 | 2.300 | 0.80 | 0.60 | 331 |


※ □ specify the inductance tolerance , M(±20%) , N(±30%)

※ IDC1 : Based on inductance change ($\Delta L/L_0 : \leq \text{drop } 35\%$) @ambient temperature 25°C

IDC2 : Based on temperature rise ($\Delta T : 40^\circ\text{C TYP.}$)

Rated DC Current : The less value which is IDC1 or IDC2.

(4) RELIABILITY TEST METHOD MECHANICAL
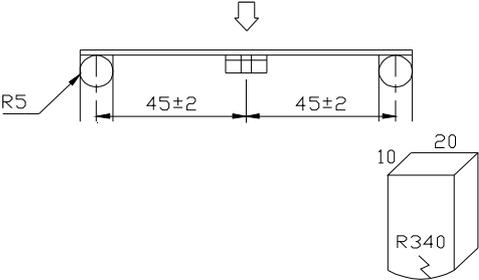
| TEST ITEM | SPECIFICATION | TEST DETAILS |
|-------------------|--|--|
| Substrate bending | $\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage or electrical damage. | <p>The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3mm.(keep time 30 seconds) PCB dimension shall the page 7/9</p> <p style="text-align: center;">F(Pressurization)</p>  <p style="text-align: center;">PRESSURE ROD figure-1</p> |
| Vibration | $\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage. | <p>The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated should be applied to the 3 directions (X,Y,Z) for 2 hours each. (A total of 6 hours)</p> |
| Solderability | New solder More than 90% | <p>Flux (rosin, isopropyl alcohol{JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±5°C.</p> <p>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.</p> |



MECHANICAL

| TEST ITEM | SPECIFICATION | |
|---|---------------------------------------|---|
| Resistance to Soldering heat (reflow soldering) | There shall be no damage or problems. | <p style="text-align: center;">Temperature profile of reflow soldering</p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time.</p> <p>The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.</p> |

ELECTRICAL

| TEST ITEM | SPECIFICATION | TEST DETAILS |
|------------------------------|--|--|
| Insulation resistance | There shall be no other damage or problems. | DC 100V voltage shall be applied across this sample of top surface and the terminal. The insulation resistance shall be more than $1 \times 10^8 \Omega$. |
| Dielectric withstand voltage | There shall be no other damage or problems. | AC 100V voltage shall be applied for 1 minute across the top surface and the terminal of this sample |
| Temperature characteristics | $\Delta L/L20^\circ\text{C} \leq \pm 10\%$ $0 \sim 2000 \text{ ppm}/^\circ\text{C}$ | The test shall be performed after the sample has stabilized in an ambient temperature of -20 to $+85^\circ\text{C}$, and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L/L20^\circ\text{C} \leq \pm 10\%$. |



ENVIROMENT CHARACTERISTICS


| TEST ITEM | SPECIFICATION | | | | | | | | | | | | | | | | |
|---|---|--|--|-------------|----------|---|--|---------|---|----------------------|-----------|---|---|---------|---|----------------------|-----------|
| High temperature storage | $\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage. | The sample shall be left for 96 ± 4 hours in an atmosphere with a temperature of $85 \pm 2^\circ\text{C}$ and a normal humidity. Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour. | | | | | | | | | | | | | | | |
| Low temperature storage | $\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage. | The sample shall be left for 96 ± 4 hours in an atmosphere with a temperature of $-25 \pm 3^\circ\text{C}$. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour. | | | | | | | | | | | | | | | |
| Change of temperature | $\Delta L/L_0 \leq \pm 5\%$ There shall be no other damage of problems | The sample shall be subject to 5 continuous cycles, then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. <div style="text-align: center;"> table 2 <table border="1" style="margin: auto;"> <thead> <tr> <th></th> <th style="text-align: center;">Temperature</th> <th style="text-align: center;">Duration</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">$-25 \pm 3^\circ\text{C}$ (Thermostat No.1)</td> <td style="text-align: center;">30 min.</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">Standard atmospheric</td> <td style="text-align: center;">No.1→No.2</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">$85 \pm 2^\circ\text{C}$ (Thermostat No.2)</td> <td style="text-align: center;">30 min.</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">Standard atmospheric</td> <td style="text-align: center;">No.2→No.1</td> </tr> </tbody> </table> </div> | | Temperature | Duration | 1 | $-25 \pm 3^\circ\text{C}$ (Thermostat No.1) | 30 min. | 2 | Standard atmospheric | No.1→No.2 | 3 | $85 \pm 2^\circ\text{C}$ (Thermostat No.2) | 30 min. | 4 | Standard atmospheric | No.2→No.1 |
| | Temperature | Duration | | | | | | | | | | | | | | | |
| 1 | $-25 \pm 3^\circ\text{C}$ (Thermostat No.1) | 30 min. | | | | | | | | | | | | | | | |
| 2 | Standard atmospheric | No.1→No.2 | | | | | | | | | | | | | | | |
| 3 | $85 \pm 2^\circ\text{C}$ (Thermostat No.2) | 30 min. | | | | | | | | | | | | | | | |
| 4 | Standard atmospheric | No.2→No.1 | | | | | | | | | | | | | | | |
| Moisture storage | $\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage. | The sample shall be left for 96 ± 4 hours in a temperature of $40 \pm 2^\circ\text{C}$ and a humidity(RH) of 90~95%. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour. | | | | | | | | | | | | | | | |
| Test conditions : <p style="text-align: center;">The sample shall be reflow soldered onto the printed circuit board in every test.</p> | | | | | | | | | | | | | | | | | |

(5) LAND DIMENSION (Ref.)


PCB: GLASS EPOXY t=1.6mm

(5)-1 LAND PATTERN DIMENSIONS

(STANDARD PATTERN) Unit:mm

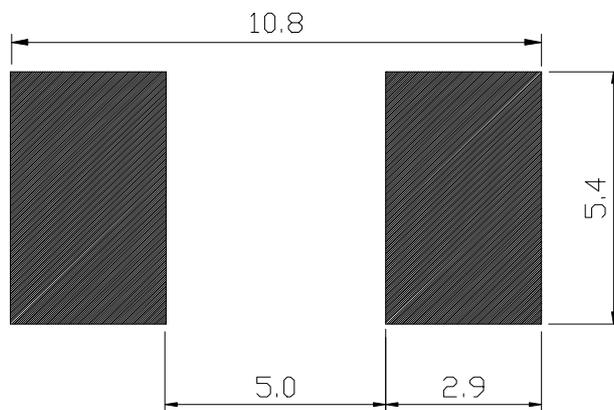


(5)-2 SUBSTRATE BENDING TEST BENDING TEST BOARD

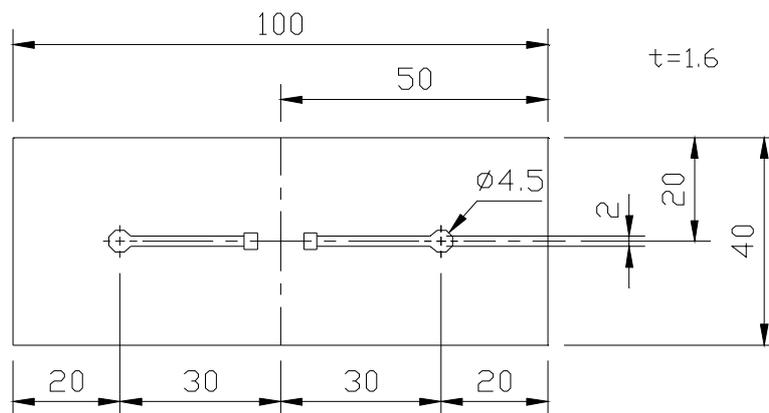


(6) PACKAGING



(6)-1 CARRIER TAPE DIMENSIONS (mm)

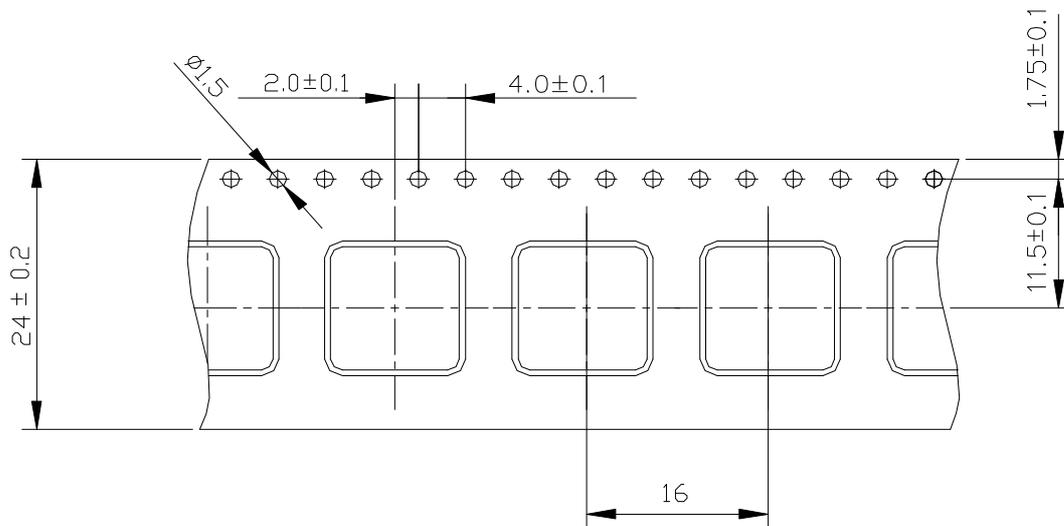

(6)-2 TAPING DIMENSIONS (mm)

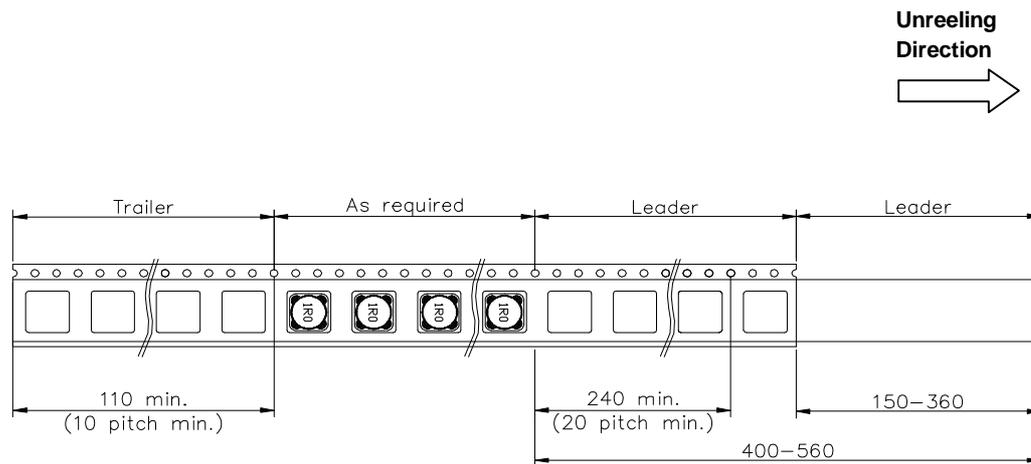

(6)-3 REEL DIMENSIONS (mm)

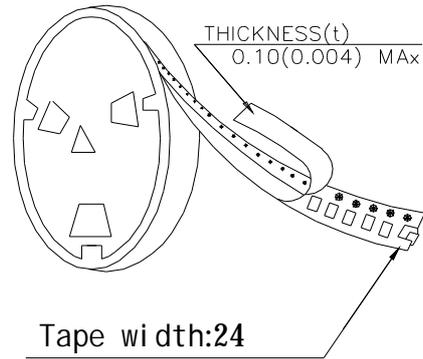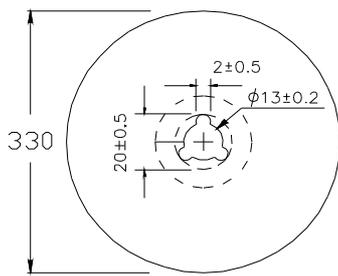

(6)-4 QUANTITY

900pcs/Reel

The products are packaged so that no damage will be sustained.

