

## SCOPE :

This specification applies to the high current type Axial Leaded Inductor  
for MCD-0608-SERIES

### PRODUCT IDENTIFICATION

**MCD - 0608 - 330 M-RU**

① ② ③ ④


① Product Code

② Dimensions Code

③ Inductance Code

④ Tolerance Code

## (1) SHAPES AND DIMENSIONS

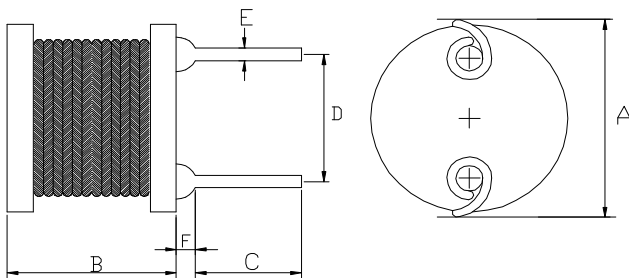

A: 7.8 Max.	mm
B: 8.5 Max.	mm
C: 15±2.0	mm
D: 3.0±0.5	mm
E: $\varnothing 0.65\pm 0.1$	mm
F: 2.0 Max.	mm

## (2) ELECTRICAL SPECIFICATIONS SEE TABLE 1

### TEST INSTRUMENTS

L : HP 4284A PRECISION LCR METER (or equivalent)

RDC : CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)

## (3) CHARACTERISTICS

(3)-1 Ambient temperature ..... +60°C Max.

(3)-2 Operate temperature range ..... -40°C ~ +125°C  
(Including self temp. rise)

(3)-3 Storage temperature range ..... -40°C ~ +125°C



**MAG.LAYERS**

**TABLE 1**

MAGLAYERS PT/NO.	Inductance L( $\mu$ H)	Percent Tolerance	Test Frequency	Resistance RDC( $\Omega$ )Max.	Rated DC Current	
					IDC1(A)	IDC2(A)
MCD-0608-2R2□-RU	2.2	M	100kHz/0.25V	16m	7.00	6.00
MCD-0608-3R3□-RU	3.3	M	100kHz/0.25V	19m	5.50	5.00
MCD-0608-4R7□-RU	4.7	M	100kHz/0.25V	23m	4.00	4.20
MCD-0608-100□-RU	10	K,M	100kHz/0.25V	0.13	2.40	3.00
MCD-0608-150□-RU	15	K,M	100kHz/0.25V	0.19	1.30	2.70
MCD-0608-220□-RU	22	K,M	100kHz/0.25V	0.30	1.15	2.00
MCD-0608-270-RU	27	K,M	100kHz/0.25V	0.40	1.10	1.80
MCD-0608-330□-RU	33	K,M	100kHz/0.25V	0.55	1.05	1.75
MCD-0608-390□-RU	39	K,M	100kHz/0.25V	0.59	1.00	1.50
MCD-0608-470□-RU	47	K,M	100kHz/0.25V	0.61	0.95	1.20
MCD-0608-500□-RU	50	K,M	100kHz/0.25V	0.62	0.93	1.10
MCD-0608-680□-RU	68	K,M	100kHz/0.25V	0.65	0.83	1.00
MCD-0608-101□-RU	100	K,M	100kHz/0.25V	0.74	0.70	0.95
MCD-0608-221□-RU	220	K,M	100kHz/0.25V	0.89	0.49	0.60
MCD-0608-391□-RU	390	K,M	100kHz/0.25V	1.32	0.37	0.50
MCD-0608-471□-RU	470	K,M	100kHz/0.25V	1.45	0.32	0.40
MCD-0608-561□-RU	560	K,M	100kHz/0.25V	2.0	0.29	0.40
MCD-0608-821□-RU	820	K,M	100kHz/0.25V	3.0	0.22	0.35
MCD-0608-152□-RU	1500	J,K	10kHz/0.25V	4.5	0.18	0.27

※ □ specify the inductance tolerance, J( $\pm$ 5%), K( $\pm$ 10%), M( $\pm$ 20%)

IDC1 : Based on inductance change ( $\Delta$ L/Lo : drop 10% Max.) @ambient temperature 25°C

IDC2 : Based on temperature rise ( $\Delta$ T : 40°C TYP.)

Rated DC Current : The less value which is IDC1 or IDC2.

## (4) RELIABILITY TEST METHOD MECHANICAL

NO.	ITEMS	SPECIFICATIONS	CONDITIONS
1	Solderability test	More than 90% of the terminal electrode should be covered with solder.	Dipping: 245 ± 5 °C, 3 ± 1 seconds
2	lead tensile strength test	1.0 Kg MIN.	The lead of product is pulled with a load of 1.0kg minimum until lead breakdown. The tensile force shall be recorded.
3	Vibration test	$\Delta L/L \leq \pm 7\%$ Visual:OK	The product is fixed into the vibration with amplitude of 1.52m/m at a frequency of 10~55Hz sweeping for 1min. The vibration is done at X,Y, Z direction respectively for 2 houes, totally 6 hours.
4	Soldering heat resistance test	Visual:OK Circuit:OK	The leads of product are dipped into a solder pot of 260±5°C for a duration of 10±1sec. Nothing particular on visual and open circuitry as a result of ore testing.

## ENVIRONMENTAL

NO.	ITEMS	SPECIFICATIONS	CONDITIONS
1	Humidity endurance test	$\Delta L/L \leq \pm 5\%$	The product is placed in a chamber of 40±2°C, 90~95%RH for 96 hours. Measurement is done after the reaovery of 4~24 hours.
2	High temp endurance test	$\Delta L/L \leq \pm 5\%$	The product is placed in a chamber of 80±2°C, for 72 hours. Measurement is done after recovery of 4~24 hours.
3	Low temp test	$\Delta L/L \leq \pm 5\%$	The product is placed in a chamber of -40±2°C, for 96 hours. Measurement is done after recovery of 4~24 hours.
4	Thermal shock test	$\Delta L/L \leq \pm 5\%$	The specimens are placed in a chamber and the temp is then lowered to -20±2°C for one hour. The temp will raised to +80±2°C for one hour. This constitutes one cycle. Ten cycles of such testing shall be completed. Measurement is made after recovery for 4~24 hours from the completion of testing.

## (5) PACKAGE SPECIFICATION (mm)

