

## SCOPE :

This specification applies to the current type Radial Leaded Inductor  
for MCD-0912-SERIES


## PRODUCT IDENTIFICATION

MCD - 0912 - 102 K-RU

① ② ③ ④

- ① Product Code
- ② Dimensions Code
- ③ Inductance Code
- ④ Tolerance Code

## (1) SHAPES AND DIMENSIONS

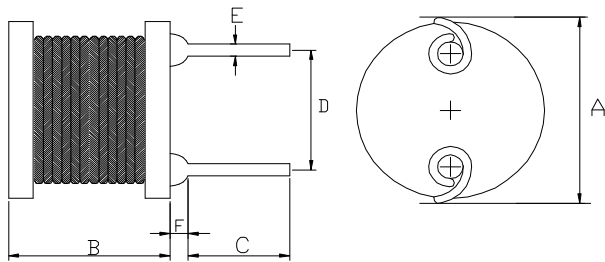

A: 11.0 Max.	mm
B: 12.5 Max.	mm
C: 15±2.0	mm
D: 5.0±0.5	mm
E: $\varnothing 0.8 \pm 0.1$	mm
F: 2.5 Max.	mm

## (2) ELECTRICAL SPECIFICATIONS SEE TABLE 1

### TEST INSTRUMENTS

L : HP 4284A PRECISION LCR METER (or equivalent)

RDC : CHROMA MODEL 16502 MILLIOHM METER (or equivalent)

## (3) CHARACTERISTICS

(3)-1 Ambient temperature ..... +60°C Max.

(3)-2 Operate temperature range ..... -40°C ~ +125°C  
(Including self temp. rise)

(3)-3 Storage temperature range ..... -40°C ~ +125°C

**TABLE 1**

MAGLAYERS PT/NO.	Inductance L( $\mu$ H)	Percent Tolerance	Test Frequency	Resistance RDC( $\Omega$ )Max.	Rated DC Current	
					IDC1(A)	IDC2(A)
MCD-0912-220□-RU	22	K,M	100kHz/0.25V	50m	4.50	3.50
MCD-0912-101□-RU	100	K,M	100kHz/0.25V	0.16	1.70	1.80
MCD-0912-121□-RU	120	K,M	100kHz/0.25V	0.20	1.50	1.70
MCD-0912-181□-RU	180	K,M	100kHz/0.25V	0.31	1.30	1.40
MCD-0912-221□-RU	220	K,M	100kHz/0.25V	0.34	1.10	1.15
MCD-0912-271□-RU	270	K,M	100kHz/0.25V	0.40	1.00	1.12
MCD-0912-301□-RU	300	K,M	100kHz/0.25V	0.46	0.96	1.10
MCD-0912-331□-RU	330	K,M	100kHz/0.25V	0.52	0.93	1.00
MCD-0912-391□-RU	390	K,M	100kHz/0.25V	0.65	0.86	0.90
MCD-0912-471□-RU	470	K,M	100kHz/0.25V	0.71	0.78	0.80
MCD-0912-501□-RU	500	K,M	100kHz/0.25V	0.80	0.75	0.78
MCD-0912-681□-RU	680	K,M	100kHz/0.25V	1.10	0.65	0.70
MCD-0912-821□-RU	820	K,M	100kHz/0.25V	1.30	0.59	0.65
MCD-0912-102□-RU	1000	K,M	100kHz/0.25V	1.70	0.53	0.60

※ 1. □ Specify the inductance tolerance, K( $\pm$ 10%), M( $\pm$ 20%)

※ 2. IDC1 : Based on inductance change ( $\Delta$ L/Lo: drop 10%Max.) @ ambient temp. 25°C

IDC2 : Based on temperature rise ( $\Delta$ T : 40°C TYP.)

Rated DC Current : The less value which is IDC1 or IDC2.



#### (4) RELIABILITY TEST METHOD MECHANICAL

NO.	ITEMS	SPECIFICATIONS	CONDITIONS
1	Solderability test	More than 90% of the terminal electrode should be covered with solder.	Dipping: 245 ± 5 °C, 3 ± 1 seconds
2	lead tensile strength test	1.0 Kg MIN.	The lead of product is pulled with a load of 1.0kg minimum until lead breakdown. The tensile force shall be recorded.
3	Vibration test	$\Delta L/L \leq \pm 7\%$ Visual:OK	The product is fixed into the vibration with amplitude of 1.52m/m at a frequency of 10~55Hz sweeping for 1min. The vibration is done at X,Y, Z direction respectively for 2 houes, totally 6 hours.
4	Soldering heat resistance test	Visual:OK Circuit:OK	The leads of product are dipped into a solder pot of 260±5°C for a duration of 10±1sec. Nothing particular on visual and open circuitry as a result of ore testing.

#### ENVIRONMENTAL

NO.	ITEMS	SPECIFICATIONS	CONDITIONS
1	Humidity endurance test	$\Delta L/L \leq \pm 5\%$	The product is placed in a chamber of 40±2°C, 90~95%RH for 96 hours. Measurement is done after the reaovery of 4~24 hours.
2	High temp endurance test	$\Delta L/L \leq \pm 5\%$	The product is placed in a chamber of 80±2°C, for 72 hours. Measurement is done after recovery of 4~24 hours.
3	Low temp test	$\Delta L/L \leq \pm 5\%$	The product is placed in a chamber of -40±2°C, for 96 hours. Measurement is done after recovery of 4~24 hours.
4	Thermal shock test	$\Delta L/L \leq \pm 5\%$	The specimens are placed in a chamber and the temp is then lowered to -20±2°C for one hour. The temp will raised to +80±2°C for one hour. This constitutes one cycle. Ten cycles of such testing shall be completed. Measurement is made after recovery for 4~24 hours from the completion of testing.



## (5) PACKAGE SPECIFICATION (mm)

