

SCOPE :

This specification applies to the Pb Free high current type SMD inductors for
MSCD-43-SERIES


PRODUCT IDENTIFICATION

MSCD- 43 - 100 K

① ② ③ ④

- ① Product Code
- ② Dimensions Code
- ③ Inductance Code
- ④ Tolerance Code

(1) SHAPES AND DIMENSIONS

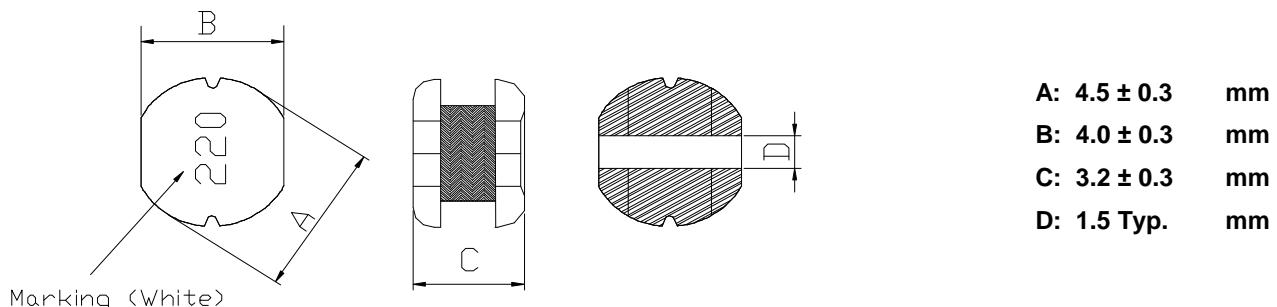

(2) ELECTRICAL SPECIFICATIONS

SEE TABLE 1

TEST INSTRUMENTS

L : HP 4284A PRECISION LCR METER (or equivalent)

RDC : CHROMA MODEL 16502 MILLIOHMMETER (or equivalent)

(3) CHARACTERISTICS

- (3)-1 Ambient temperature +60°C Max.
- (3)-2 Operate temperature range -40°C ~ +125°C
(Including self temp. rise)
- (3)-3 Storage temperature range -40°C ~ +125°C



MAG.LAYERS

TABLE 1


MAGLAYERS PT/NO.	Inductance L(μH)	Percent Tolerance	Test Frequency	Resistance RDC(Ω)Max.	Rated DC Current IDC(A)	Marking	Wire Tuns(Ref.)
MSCD-43-1R0□-RU	1.0	M	100kHz/0.25V	48.7m	2.70	1R0	—
MSCD-43-1R2□-RU	1.2	M	100kHz/0.25V	52.4m	2.60	1R2	—
MSCD-43-1R4□-RU	1.4	M	100kHz/0.25V	56.2m	2.50	1R4	—
MSCD-43-1R5□-RU	1.5	M	100kHz/0.25V	56.2m	2.50	1R5	—
MSCD-43-1R8□-RU	1.8	M	100kHz/0.25V	63.7m	2.33	1R8	—
MSCD-43-2R2□-RU	2.2	K,M	100kHz/0.25V	71.2m	2.25	2R2	—
MSCD-43-2R7□-RU	2.7	K,M	100kHz/0.25V	78.7m	2.16	2R7	—
MSCD-43-3R3□-RU	3.3	M	100kHz/0.25V	86.2m	2.00	3R3	Φ0.25 12.5Ts
MSCD-43-3R9□-RU	3.9	M	100kHz/0.25V	93.7m	1.84	3R9	—
MSCD-43-4R7□-RU	4.7	M	100kHz/0.25V	0.1087	1.62	4R7	—
MSCD-43-5R6□-RU	5.6	M	100kHz/0.25V	0.1257	1.48	5R6	—
MSCD-43-6R8□-RU	6.8	M	100kHz/0.25V	0.1312	1.43	6R8	—
MSCD-43-8R2□-RU	8.2	M	100kHz/0.25V	0.1462	1.37	8R2	—
MSCD-43-100□-RU	10	K,M	100kHz/0.25V	0.182	1.04	100	—
MSCD-43-120□-RU	12	M	100kHz/0.25V	0.210	0.97	120	—
MSCD-43-150□-RU	15	M	100kHz/0.25V	0.235	0.85	150	—
MSCD-43-180□-RU	18	M	100kHz/0.25V	0.338	0.74	180	—
MSCD-43-220□-RU	22	K,M	100kHz/0.25V	0.378	0.68	220	—
MSCD-43-270□-RU	27	M	100kHz/0.25V	0.522	0.62	270	—
MSCD-43-330□-RU	33	K,M	100kHz/0.25V	0.540	0.56	330	—
MSCD-43-390□-RU	39	K,M	100kHz/0.25V	0.587	0.52	390	—
MSCD-43-470□-RU	47	K,M	100kHz/0.25V	0.844	0.44	470	—
MSCD-43-560□-RU	56	K,M	100kHz/0.25V	0.937	0.42	560	—
MSCD-43-680□-RU	68	K,M	100kHz/0.25V	1.117	0.37	680	—
MSCD-43-820□-RU	82	K,M	100kHz/0.25V	1.200	0.30	820	—
MSCD-43-101□-RU	100	K	100kHz/0.25V	1.440	0.28	101	—
MSCD-43-121□-RU	120	K	100kHz/0.25V	1.60	0.24	121	—
MSCD-43-151□-RU	150	K	100kHz/0.25V	1.80	0.22	151	—
MSCD-43-181□-RU	180	K	100kHz/0.25V	2.18	0.21	181	—
MSCD-43-221□-RU	220	K	100kHz/0.25V	2.57	0.20	221	—
MSCD-43-271□-RU	270	K	100kHz/0.25V	3.52	0.18	271	—
MSCD-43-331□-RU	330	K	100kHz/0.25V	5.00	0.12	331	—
MSCD-43-391□-RU	390	K	100kHz/0.25V	6.00	0.115	391	—
MSCD-43-471□-RU	470	K	100kHz/0.25V	7.00	0.11	471	—

※ □ specify the inductance tolerance,K(±10%),M(±20%)

※ IDC: Based on inductance change ($\Delta L/L_0$: drop 10% Max.) @ ambient temp. 25°CBased on temperature rise (ΔT : 40°C TYP.)**MAG.LAYERS****MSCD-43-SERIES-RU****Page-2/8**


(4) RELIABILITY TEST METHOD

MECHANICAL

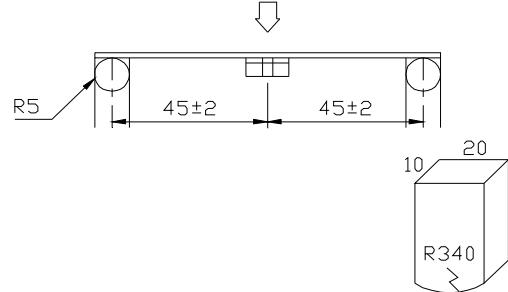TEST ITEM	SPECIFICATION	TEST DETAILS
Substrate bending	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage or electrical damage.	<p>The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3mm.(keep time 30 seconds)</p> <p>PCB dimension shall the page 7/9</p> <p style="text-align: center;">F(Pressurization)</p>  <p style="text-align: center;">PRESSURE ROD figure-1</p>
Vibration	$\Delta L/L_0 \leq \pm 5\%$ There shall be no mechanical damage.	<p>The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated should be applied to the 3 directions (X,Y,Z) for 2 hours each.</p> <p>(A total of 6 hours)</p>
Solderability	New solder More than 90%	<p>Flux (rosin, isopropyl alcohol{JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±5°C.</p> <p>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath.</p>



MECHANICAL

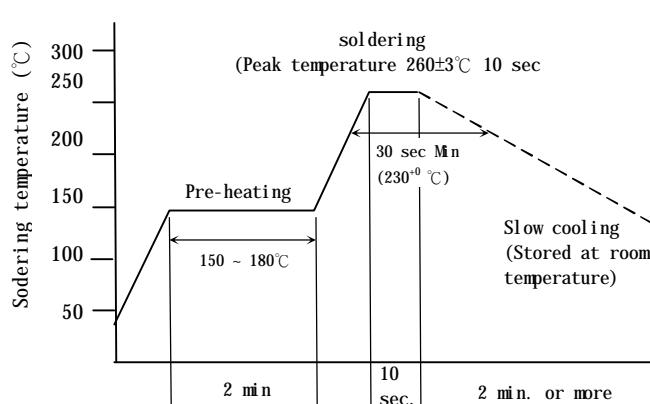TEST ITEM	SPECIFICATION	
Resistance to Soldering heat (reflow soldering)	<p>There shall be no damage or problems.</p>  <p>The graph shows the temperature profile during reflow soldering. The y-axis is 'Soldering temperature (°C)' from 50 to 300. The x-axis shows time intervals. The 'Pre-heating' phase rises from ~50°C to a plateau between 150°C and 180°C over 2 minutes. The 'soldering' phase rises sharply to a peak of 260±3°C in 10 seconds, maintaining a minimum of 30 seconds at 230°C (labeled '30 sec Min (230°C)'). The 'Slow cooling' phase follows, returning to room temperature over 2 minutes or more. A horizontal dashed line extends from the end of the soldering phase.</p> <p>Temperature profile of reflow soldering</p>	<p>Temperature profile of reflow soldering</p> <p>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time.</p> <p>The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.</p>

ELECTRICAL

TEST ITEM	SPECIFICATION	TEST DETAILS
Insulation resistance	<p>There shall be no other damage or problems.</p>	<p>DC 100V voltage shall be applied across this sample of top surface and the terminal.</p> <p>The insulation resistance shall be more than $1 \times 10^8 \Omega$.</p>
Dielectric withstand voltage	<p>There shall be no other damage or problems.</p>	<p>AC 100V voltage shall be applied for 1 minute across the top surface and the terminal of this sample</p>
Temperature characteristics	<p>$\Delta L/L20^\circ\text{C} \leq \pm 10\%$</p> <p>0~2000 ppm/°C</p>	<p>The test shall be performed after the sample has stabilized in an ambient temperature of -20 to +85°C, and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L/L20^\circ\text{C} \leq \pm 10\%$.</p>



MAG.LAYERS

ENVIRONMENT CHARACTERISTICS

TEST ITEM	SPECIFICATION																
High temperature storage	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 96±4 hours in an atmosphere with a temperature of 85±2°C and a normal humidity. Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Low temperature storage	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 96±4 hours in an atmosphere with a temperature of -25±3°C. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.															
Change of temperature	$\Delta L/Lo \leq \pm 5\%$ There shall be no other damage or problems	The sample shall be subject to 5 continuous cycles, such as shown in the table 2 below and then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made.															
		table 2															
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25±3°C (Thermostat No.1)</td> <td>30 min.</td> </tr> <tr> <td>2</td> <td>Standard atmospheric</td> <td>No.1→No.2</td> </tr> <tr> <td>3</td> <td>85±2°C (Thermostat No.2)</td> <td>30 min.</td> </tr> <tr> <td>4</td> <td>Standard atmospheric</td> <td>No.2→No.1</td> </tr> </tbody> </table>		Temperature	Duration	1	-25±3°C (Thermostat No.1)	30 min.	2	Standard atmospheric	No.1→No.2	3	85±2°C (Thermostat No.2)	30 min.	4	Standard atmospheric	No.2→No.1
	Temperature	Duration															
1	-25±3°C (Thermostat No.1)	30 min.															
2	Standard atmospheric	No.1→No.2															
3	85±2°C (Thermostat No.2)	30 min.															
4	Standard atmospheric	No.2→No.1															
Moisture storage	$\Delta L/Lo \leq \pm 5\%$ There shall be no mechanical damage.	The sample shall be left for 96±4 hours in a temperature of 40±2°C and a humidity(RH) of 90~95%. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour.															
Test conditions : The sample shall be reflow soldered onto the printed circuit board in every test.																	




MAG.LAYERS

(5) LAND DIMENSION (Ref.)


PCB: GLASS EPOXY $t=1.6\text{mm}$

(5)-1 LAND PATTERN DIMENSIONS

(STANDARD PATTERN) Unit:mm

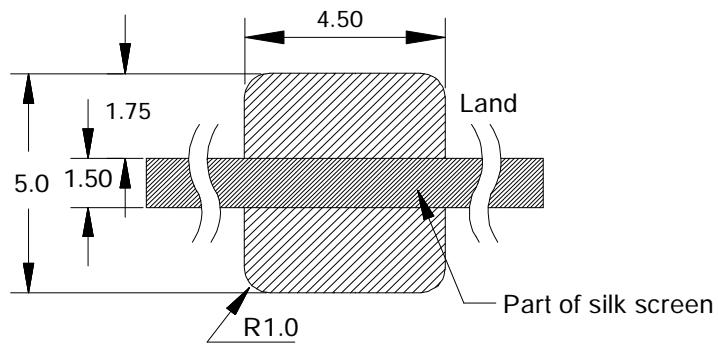


(5)-2 SUBSTRATE BENDING TEST BENDING TEST BOARD

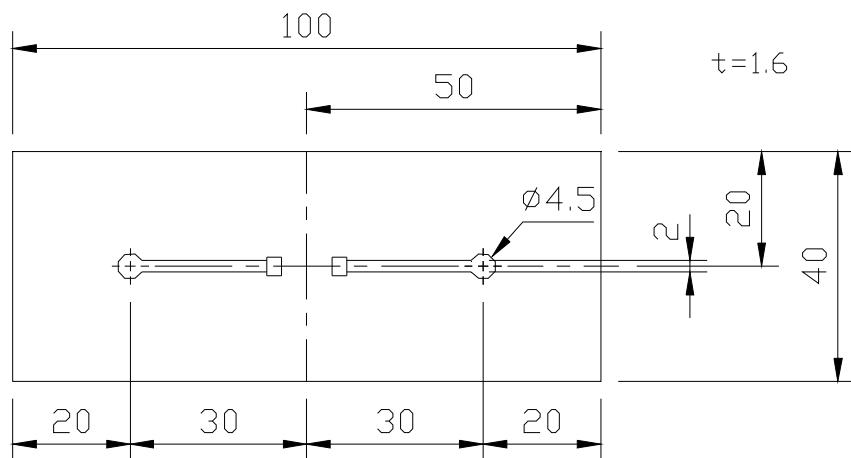

MAG.LAYERS


(6) PACKAGING

(6)-1 CARRIER TAPE DIMENSIONS (mm)

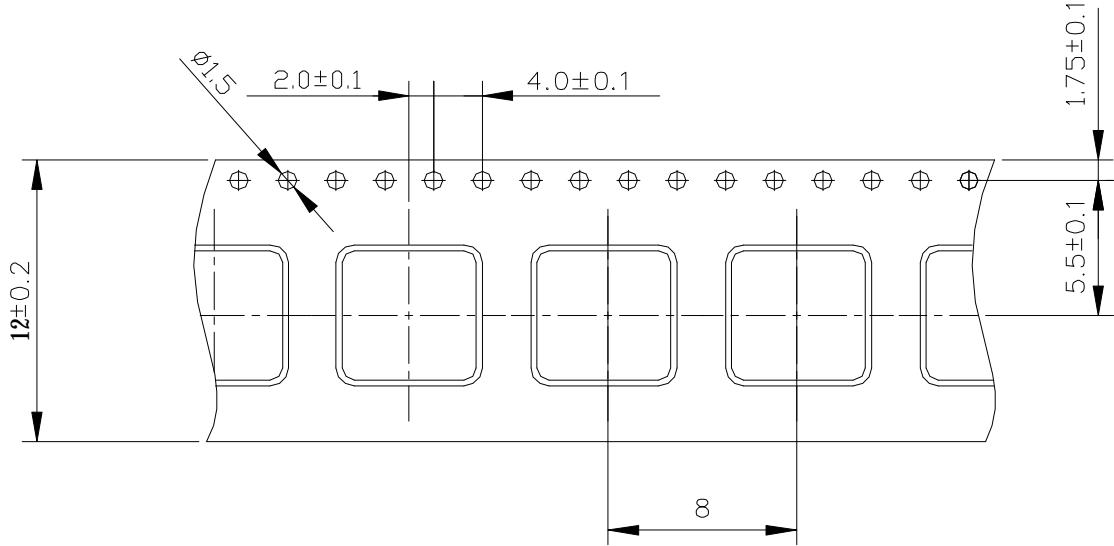

(6)-2 TAPING DIMENSIONS (mm)

Unreeling
Direction


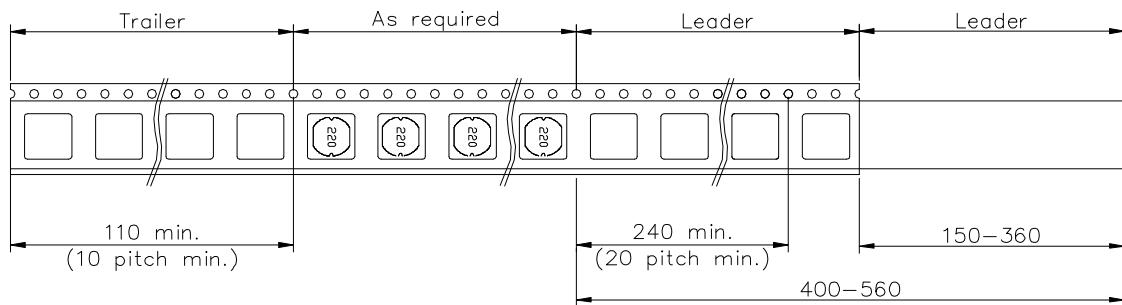


MAG.LAYERS

MSCD-43-SERIES-RU

Page-7/8

(6)-3 REEL DIMENSIONS (mm)

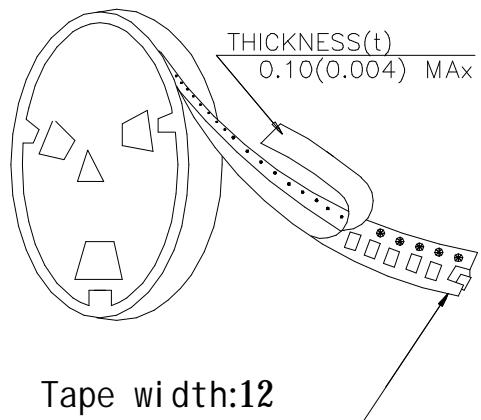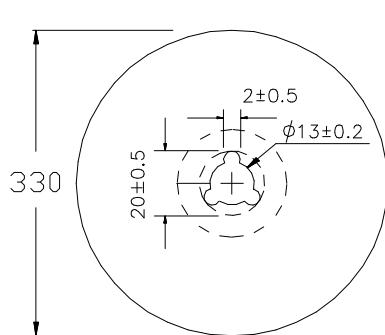

(6)-4 QUANTITY

1500 pcs/Reel

The products are packaged so that no damage will be sustained.



MAG.LAYERS