

■ APPLICATION

Low profile, high current power supplies
Battery powered devices
DC/DC converters in distributed power systems
DC/DC converters for field programmable gate array

■ FEATURES

RoHS Compliant & Halogen Free
Super low resistance, ultra high current rating
High performance (I sat) realized by Iron powder core

■ PRODUCT IDENTIFICATION


① ② ③ ④ ⑤

MLA - FY15N R25 N – M3

- ① Product Code
- ② Dimensions : 3.2 X 2.5 X 1.5 mm
- ③ Inductance : R25 = 0.25 μ H
- ④ Tolerance : N = \pm 30%
- ⑤ Series Type : M3 Type

NOTE : Please refer to the “Product Dimension” for detail dimensions.

PRODUCT DIMENSION

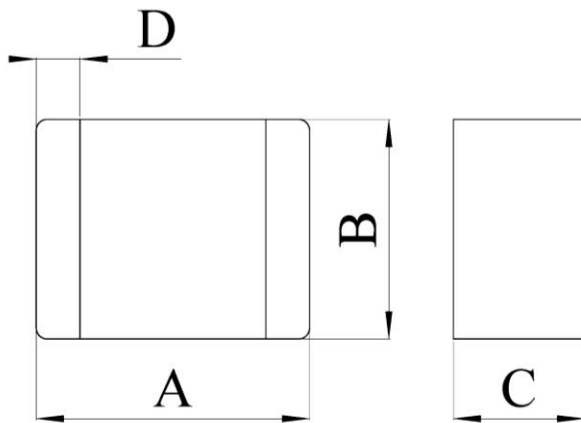

NOTE : Dimensions in mm

PRODUCT NO.	A	B	C	D
MLA-FY15NR25N-M3	3.2 ± 0.2	2.5 ± 0.2	1.5 Max	0.6 ± 0.2

ELECTRICAL REQUIREMENTS

PART NUMBER	INDUCTANCE Lo(μ H) \pm 30% @0A	R _{dc} (m Ω) Max	HEAT RATING CURRENT(I _{dc}) DC AMPS ¹	SATURATION CURRENT(I _{sat}) DC AMPS ²
MLA-FY15NR25N-M3	0.25	12	8	10

TEST FREQUENCY: 1MHz, 0.25V

TESTING INSTRUMENT L: Agilent4285A, CH3302/G LCR METER

CH1320, CH1320S BIAS CURRENT SOURCE


R_{dc} : CH11025, GOM802 MICRO OHMMETE

NOTES:

- 1.DC current (I_{dc}) that will cause an approximate ΔT of 40°C
- 2.DC current (I_{sat}) that will cause Lo to drop approximately 30%
- 3.All test data is referenced to 25°C ambient
- 4.Operating Temperature Range -40°C to +150°C
- 5.Withstand voltage : 25V DC


ELECTRICAL CHARACTERISTICS

Reference data

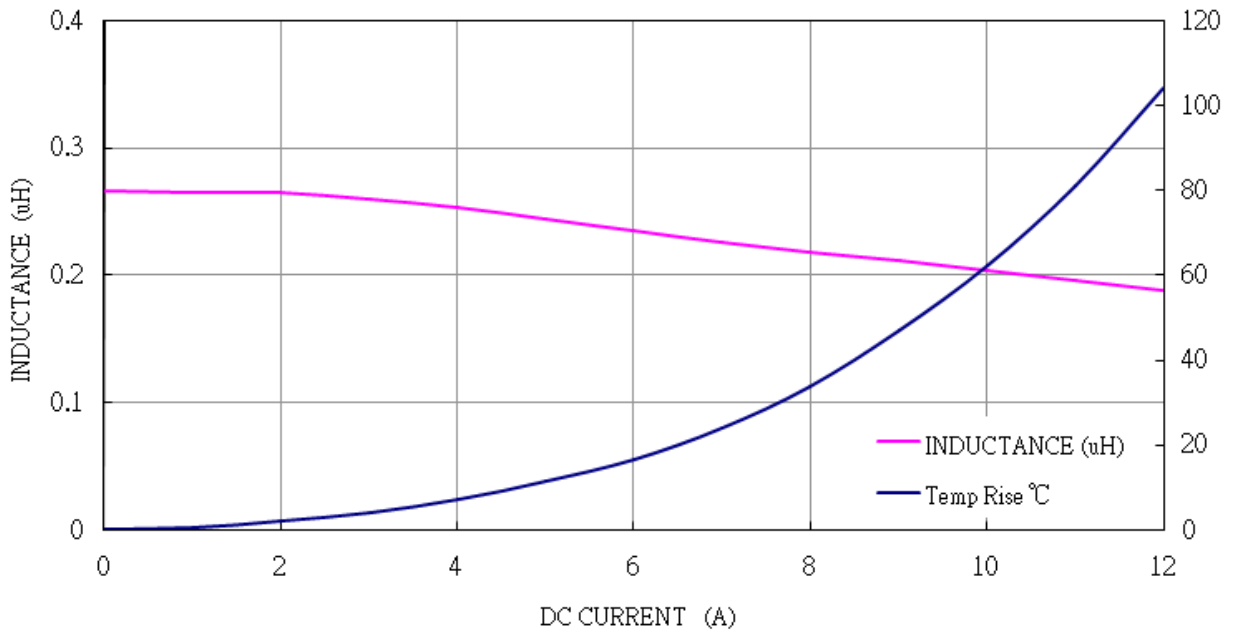


PACKAGING

● Peel-off Force

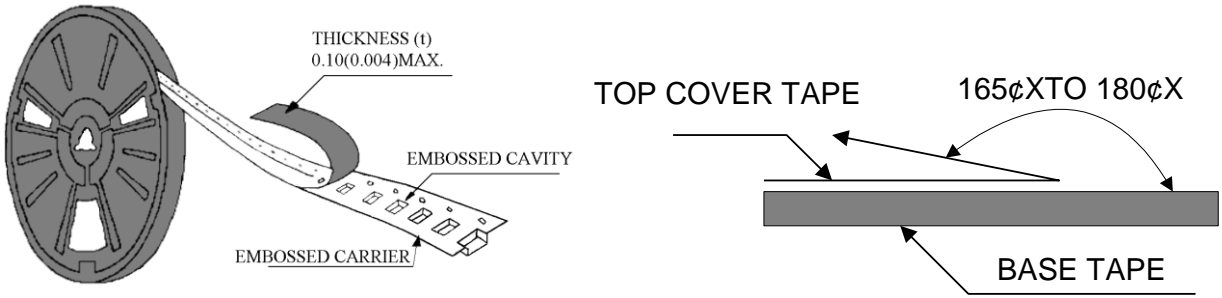


The force for peeling off cover tape is 10 grams in the arrow direction.


● Dimension (Unit: mm)

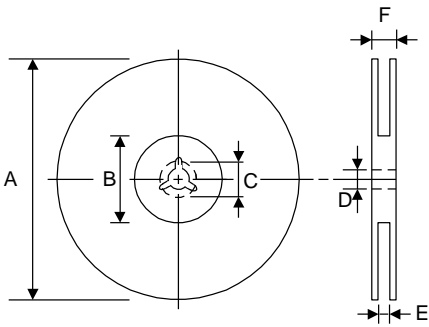

TYPE	A	B	C	D	E	F
8 mm	178±1	60 +0.5 -0	19.3 ±0.1	13 ±0.2	9 ±0.5	12 ±0.5

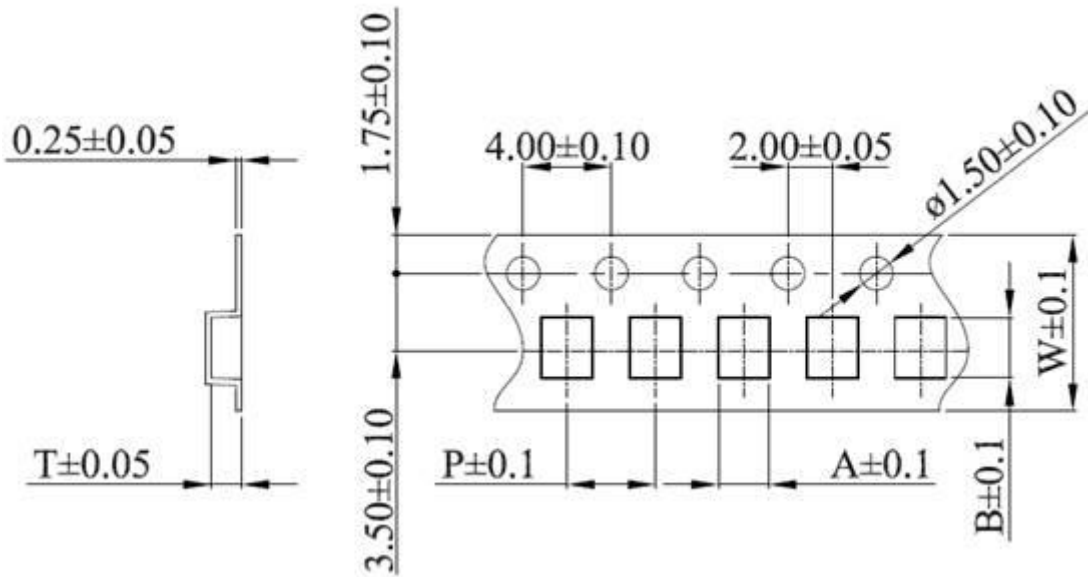


TYPE	SIZE	A	B	W	P	T
MLA	FY15	2.8	3.5	8	4	1.7

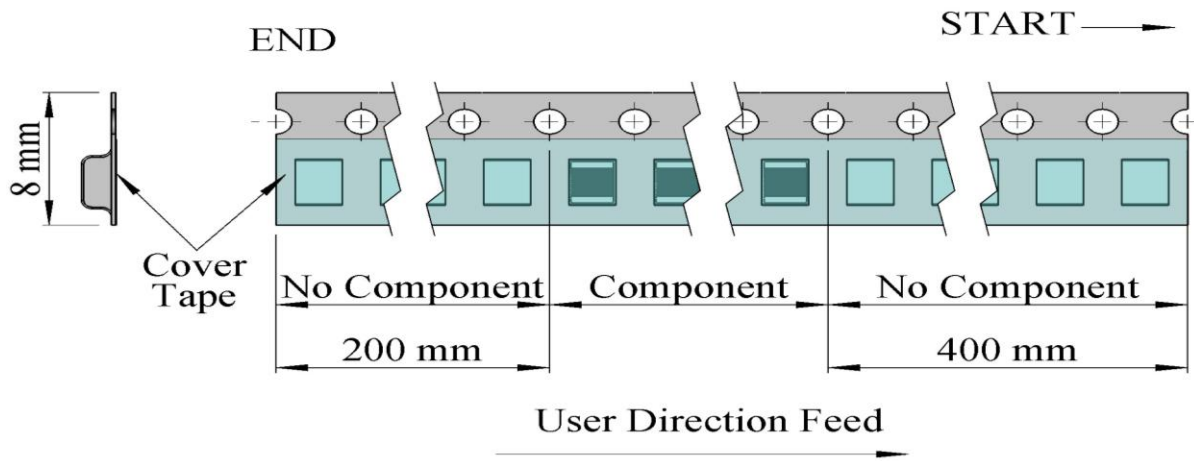

- Taping Quantity

SERIES	FY15
PCS/Reel	3000


- Tape Packing Case

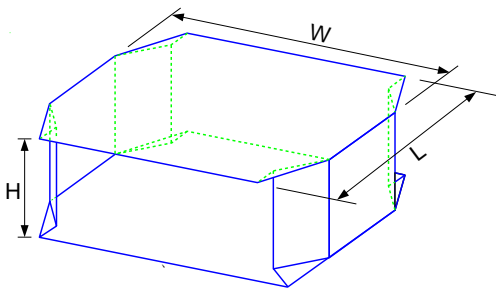

No. of Reels	W	L	H
2	18±0.5	18±0.5	2.4±0.2
3	18±0.5	18±0.5	3.6±0.2
4	18±0.5	18±0.5	4.8±0.2
5	18±0.5	18±0.5	6.0±0.2

Unit: cm

RECOMMENDED PCB LAYOUT

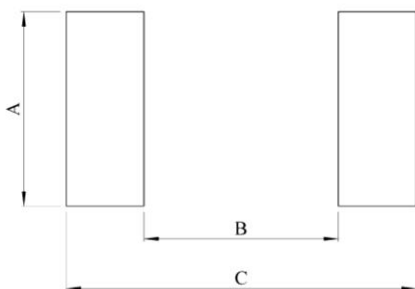

Type	FY15
A	2.5
B	1.7
C	3.5